9HKLFOH VWDELOLW\ W IORZV

By * 3 6PLWK % ' 0RGUD 7 $ 7XFNHU DQG 5

WRL TR 201 / , 0D\2 1

School of Civil and Environmental Engineering

Vehicle Stability Testing for Flood Flows

WRL Technical Report 2017/07

May 2017

by
G P Smith, B D Modra , T A Tucker and R J Cox

Project Det

Executive Summary

Every year floods cause enormous damage and loss of life on a global scale. An analysis of global statistics for loss o f life showed that inland floods (river floods, flash floods and drainage floods) caused 175,000 fatalities and affected more than 2.2 billion people between 1975 and 2002 (Jonkman, 2005) . More recent global analysis not ed that 59,092 flood fatalities occurred worldwide between 2005 and 2014 (International Federation of Red Cross and Red Cres cent Societies, 2015) .

In a recent detailed analysis of flood fatalities in Australia, Haynes et al. (2016) noted that 1,859 peo ple have died in floods since 1900 and that 178 of these flooding related deaths have occurred since 2000

reasons, the ad - hoc use of the above tabulated stability criteria by individuals in real flood situation s to assess the safety of a road crossing is actively discourag ed.

This report does not account for behaviour of drivers in flood emergencies, which remains a

Contents

Executive Summary i

1. Introduction 1
2. Background: Vehicle Stability in Floodwaters 2
   - 2.1 Vehicle stability information ± literature review 3
     - 2.1.1 Anecdotal evidence 9
     - 2.1.2 Summary findings 10
3. Research Scope 11
4. Methodology 12
   - 4.1 Overview 12
   - 4.2 Formulation of the problem 14
     - 4.2.1 Friction force of a vehicle 14
     - 4.2.2 Hydrodynamic drag on a vehicle 16
5. Full Scale Vehicle Traction Tests 21
   - 5.1 Overview 21
   - 5.2 Test vehicles 21
   - 5.3 Tyre coefficient of friction 23
   - 5.4 Overview of traction tests 24
   - 5.5 Test results 26
6. Hydrodynamic Force Testing (1:18 Scale) 32
   - 6.1 Overview 32
   - 6.2 Subcritical flows (tailwater controlled) 34
   - 6.3 Critical flows (broad crested weir) 34
   - 6.4 Supercritical flow (undershot gate) 35
   - 6.5 Horizontal force testing results 36
7. Discussion of Results 39
   - 7.1 Observations 39
   - 7.2 Comparison of tested vehicles to other vehicles 41
   - 7.3 Testing uncertainties 43
   - 7.4 Interpretation of test information for floodplain management and emergency management 43
     - 7.4.1 Preamble 43
     - 7.4.2 Comparison with existing flood hazard curves 44
8. Conclusions 49
   - 8.1 Recommendations 49
9. Acknowledgements 51
10. References 52

Figure 5 - 2: 1LVVDQ 3DWURO LQ :5/¶V ZDYH IDFLOLW\ SUHSDULQJ IRU D ZH rear axle 22
Figure 5 - 3: Winch assembly in W RL Lab#2, including (a) framework, winch and dynamometer, (b) pulley and wheel attachment 23
Figure 5 - 4: 5D SL HH OLQJ RI :5/¶V WHVW WDQN ZDYH EDVLQ 7KH ZLQFH shown. 25
Figure 5 - 5: 7R\RWD <DULV LQ :5/¶V ZDYH EDVLQ IDFLOLW\ LQ ð ðà E'Pð ðà EE

1. Introduction

Every year floods cause enormous damage and loss of life on a global scale. An analysis of global statistics for loss of life showed that inland floods (river floods, flash floods and drainage floods) caused 175,000 fatalities and affected more than 2.2 billion people between 1975 and 2002 (Jonkman, 2005) . More recent global analysis noted that 59,092 flood fatalities occurred worldwide between 2005 and 2014 (International Federation of Red Cross and Red Crescent Societies, 2015) .

In a recent detailed analysis of flood fatalities in Australia , Haynes et al. , (2016) noted that 1,859 people have died in floods since 1900 and that 178 of these flooding related deaths have occurred since 2000 . The study noted that while flood fatality rates are generally falling per capita, the number of fatalities that occurred in vehicles , partic

mappi

While there is general agreement on the mechanisms for vehicle instability (Figure 2-2), a collation of literature on the flow conditions which induce vehicle instability notes a wide range of values. Shand et al., (2011) highlights that guidelines provided for vehicle stability on floodways have generally been based on the product of depth and velocity, as derived by scaled experimental investigations of stationary vehicle stability. Shand et al., (2011) provides a comprehensive summary of literature published prior to 2010. These studies, highlighted substantial changes in vehicle design since the original studies of vehicle stability by Bonham and Hattersley (1967) and Gordon and Stone (1973) which have been used as the basis of flood hazard policy in Australia. There was no significant research published in this field of vehicle stability in the intervening period between Gordon and Stone ¶V ZRUN LQ DQG 6KDQG HW literature review in 2011.

More recent investigations of vehicle stability are not included in the review by Shand et al., (2011). Recent experimental investigations have been undertaken using scale model die-cast vehicles in a horizontal hydraulic flume at the Hydro-environmental Research Centre of Cardiff University, United Kingdom (Shu et al., 2011; Xia et al. 2011). These studies evaluated the theoretical forces exerted on a fully submerged and static vehicle under flow conditions to derive an expression for the instability threshold. The drag and frictional coefficients were included implicitly within the expression and derived by laboratory flume testing using model vehicles. This methodology differed from previous studies, where reaction forces were measured for a geometrically scaled vehicle subject to flows and the instability threshold was calculated for various coefficients of friction.

Xia et al., (2011) tested three types of vehicle using an initial geometric scale of 1:43 with verification tests at a larger 1:18 scale. Shu et al. (2011) tested the same three vehicle types namely Mitsubishi Pajero, BMW M5, Mini Cooper, undertaking all tests at 1:18 scale. Both testing programs assumed all wheels to be locked and the vehicle orientated parallel to the flow direction. Velocity was increased for a given depth until vehicle motion was initiated. Experimental results were

coefficient ($\mu = 0.5$) g ave

Importantly, Shand et al., (2011) highlighted and Martinez -

Figure 2-7: Youtube footage of flooded cars in the T oowoomba floods of January 2010

3. Research Scope

The research scope for this project

4. Methodology

4.1

Figure 4-2: 1LVVDQ 3DWURO LQ :5/¶V ZDYH EDVLQ IDFLOLW\ SUHSDULQJ IRU D ZLQGF
axle

Forces were considered separately at the vehicle front and rear axle s. This allowed consideration o f stability of the vehicle as a whole, or stability failure when traction is lost at one axle first and then rotated into alignment with the direction of flow . Specifically, a s ubstantial part of the testing focused on the stability of the rear axle as floating of the rear of the vehicle has previously been identifi ed as the most likely initiation point of instability of a vehicle exposed to floodwaters.

The choice of the axles as reference points on the vehicle provides a number of advantages. Fundamentally it allows consideration of the forces through their point of action (i .e. friction at the wheels) and particularly the separation of forces at the front and rear axles allow s the measurement of the instant of traction loss at the rear axle. The axle provides a convenient location for vehicle force measurement that does not load or unload the vehicle suspension ..

Scale model testing was then completed to determine the equi valent hydrodynamic forces required to reproduce the prototype scale vehicle instability forces. Further, detailed description of the experiment methodology is provided in the following sections.

force (20%), and a further reduction due to debris that may become caught under the wheels (20%). This resulted in a friction coefficient of $\mu = 0.3$ that was used uniformly across all their tests. This value has been widely adopt

If the object is in an open channel flow, the surface of the water may not be steady resulting in additional drag components:

3. Wave Drag: due to the deformation of the water surface, i.e. the generation of a wake; and
4. Spray Drag: the upward jetting of water into the air at the object.

Hoerner (1965) investigated drag forces on bodies in free-surface flows in detail, and provided drag coefficients for flat plates and cylinders piercing the surface of water flow in different flow regimes (Figure 4-4 and Figure 4-5). The cylinder provided

x The width versus depth of the vehicle is o

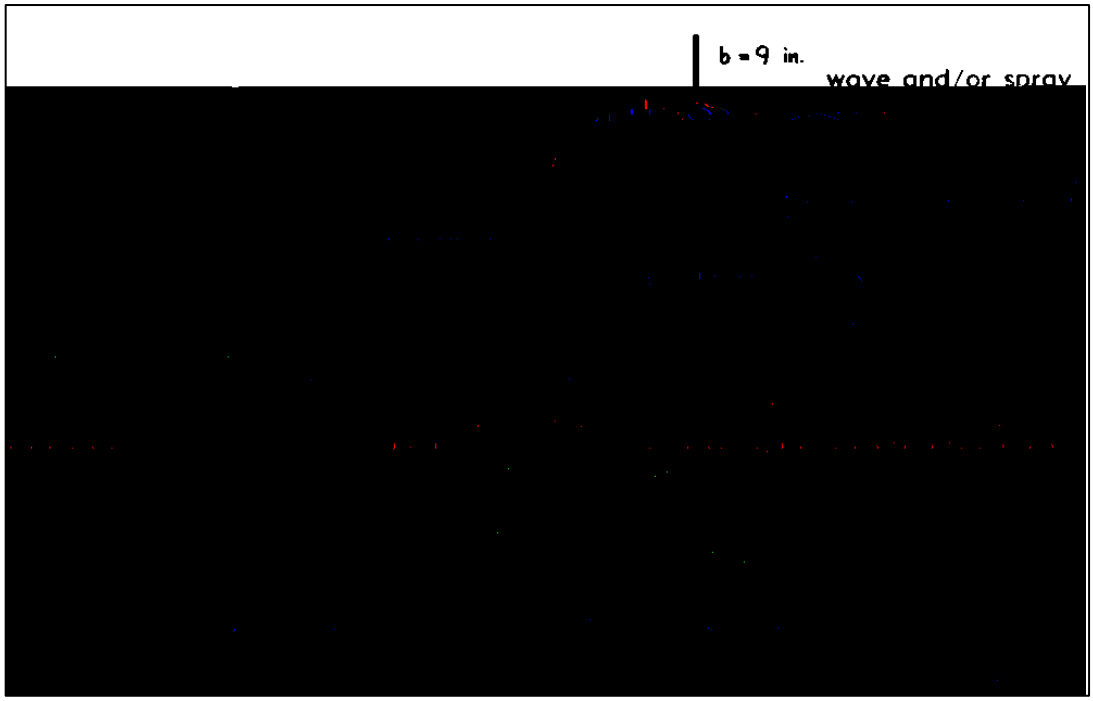

Figure 4-5 Drag coefficient of surface ±piercing flat plates (on area b times h), extracted from Hoerner (1965)

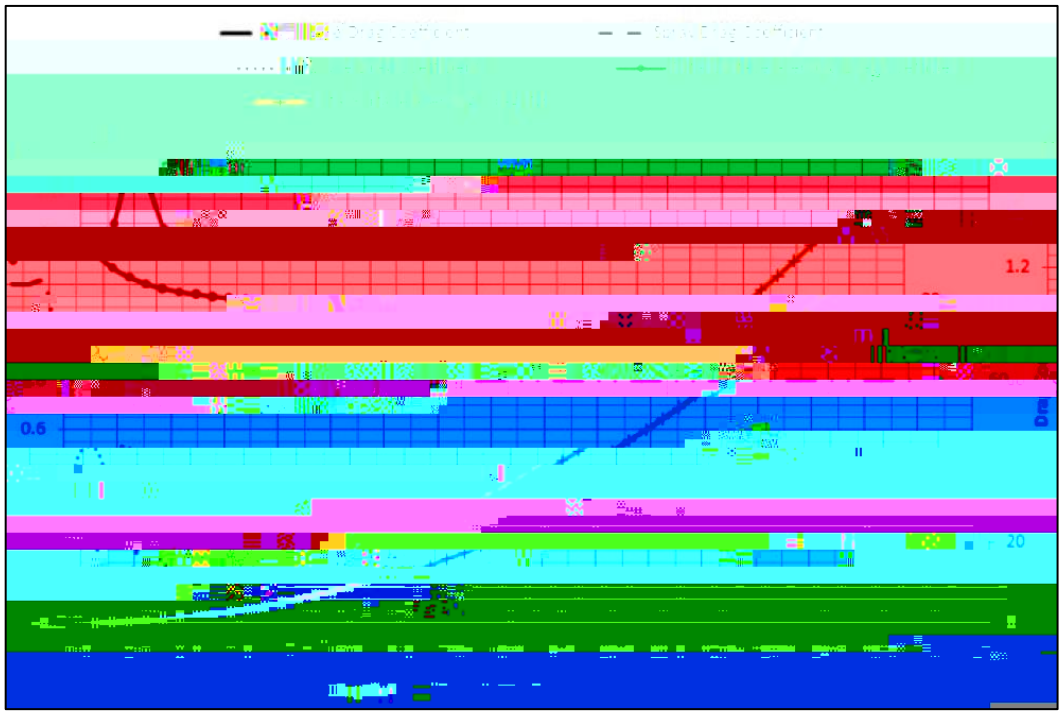

Figure 4-6: + R H U Q H U (1965) formulation for surfacing piercing drag , extract ed from Bowen et. al. (2011)

Figure 4-7: Flood flows over a causeway approaching Froude Fr = 1

Uplift forces

Vertical forces on the vehicle due to hydrodynamic effects are referred to here as uplift forces, though it has been observed that these may also be negative, pulling the vehicle downwards.

Discussions with the authors of Gordon and Stone (1973) suggest that uplift due to the impact of flow into D Y H K L F O H Q W would contribute to destabilisation of the vehicle. But like horizontal drag, the processes leading to a vertical uplift force are complex. Flows impacting the upstream underbody may force the vehicle upwards. Alternatively, accelerated flows under the vehicle may act to pull the vehicle downwards. Rocking of the vehicle on its suspension would present an angled underbody to the flow. Differential water levels upstream and downstream of the

Appropr iate corrections to the traction force due to the difference between the coefficient of friction in the ideal laboratory conditions provided here and a suitably conservative coefficient of friction to be used in estimating the stability of vehicles in floo d waters is discussed in detail in Section 4.2.1 .

Table 5-2: Coefficient of friction results *

	Nissan Patrol	Nissan Patrol
Method	Wet Floor, Rear Axle	Dry Floor, Rear Axle
Vehicl e Weight	(1290kg)	(1290kg)
Tow Force	(964kg)	(1011kg)
Coefficient of Friction	0.75	0.78
Conservative Coefficient of Friction	0.3	0.3

*Unfortunately direct measurements for coefficient of friction were not completed for the Toyota Yaris

5.4 Overview of traction tests

Tractions tests were conducted on the tw147.03 Tm [( )] TJ 2 /F8o

Figure 5-4 5DSLG ILOOLQJ RI :5/¶V (wave basin) WDTM. The winch assembly is also shown.

The Nissan Patrol 4WD, was tested in two (2) WRL facilities. Initial tests in the first facility (wave basin) provided water depths up to 660 mm. Subsequent modelling in the second facility

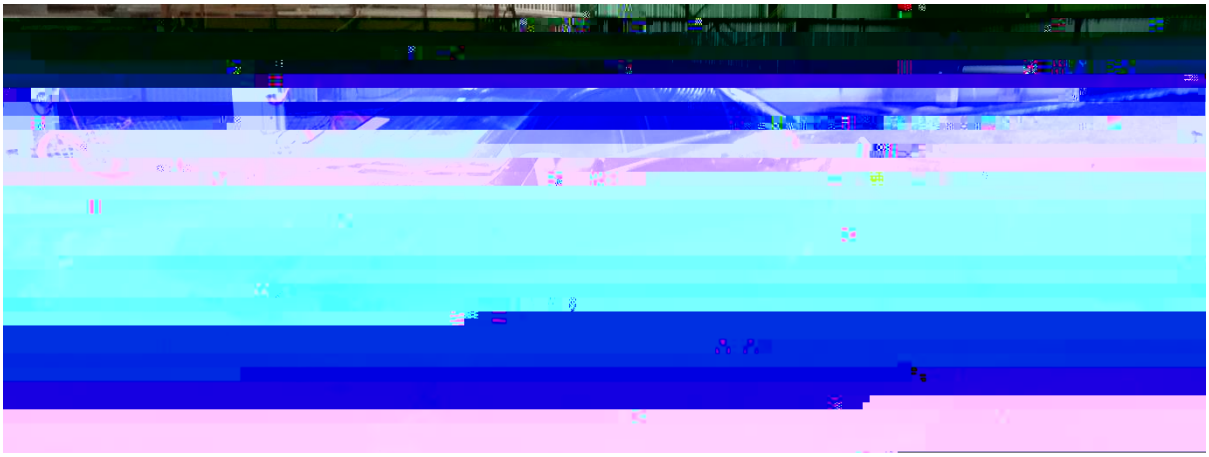

Figure 5-5 7R\RWD <DULV LQ :5/¶V ZDYH EDVLQ with water depth with rear wheel s clear of the floor

Figure 5-6 The lead author demonstrating zero traction at the rear wheels for the Nissan Patrol 4WD LQ :5/¶V /DE W H V W L Q Water depth is approximately 1.0 m.

5.5 Test results

Time series of traction force for each test is provided in Figure 5-7 to Figure 5-9 for the Toyota Yaris, and Figure 5-10 for the Nissan Patrol 4WD. Note that the forces have been converted to kN for these figures, while the data recorded by the dynamometer is in metric tonnes.

Results of the peak measured traction force (the maximum force measured) for tests on the three (3) cases for the Toyota Yaris are provided in Table 5-3. Results of the peak measured traction force for tests on the Nissan Patrol 4WD are provided in Table 5-4.

6.2 Subcritical flows (tailwater controlled)

Subcritical flows are commonly found in flood conditions. They are typically deeper, slower moving waters as demonstrated in Figure 6-2. For the experimental test under subcritical flow conditions, the Froude number range was $0.30 < Fr < 0.76$.

Figure 6-2: Testing of the model in subcritical flows : Fr = 0.3, d= 0.71m, v = 0.80m/s (prototype)

6.3 Critical flows (broad crested weir)

Critical flows are less commonly found inlog w ios, (e)734(i)-5s(b)-19 Tm [(S)4(u)6(b)-3(cri)-4(t)-5(i)-5(cal)-3( )-34(f)5(l)-,6(n)6(l

al

Figure 6-4: Testing of the model in supercritical flows d = 0.22 5m, v=4.0m/s (prototype) , C_D = 1.86 , Fr = 2.66

6.5 Horizontal force testing results

Horizontal force test results are summarised in Table 6-1. The drag coefficient results are plotted against Froude number Fr in Figure 6-5.

Coefficient of Drag

Testing showed a range in the coefficient of drag across all flow regimes from 1.0 to 1.8. Values in the subcritical range were quite scattered, but showed a slight trend upwards over the range of Froude number from 0.30 to 0.76.

Critical flows through the tested range of supercritical flows (up to Fr= 4.2), showed a smaller range of coefficient of drag of 1.1 to 1.6. However, the lower values were measured in tests where the flow depths were lower than the body of the vehicle, so impact is predominantly with the wheels alone. Flows which impacted the body of the vehicle typically ranged from C_D of 1.4 to 1.6.

Table 6-1: Summary of Horizontal Force Testing (prototype)

	Test	Force Rear (kN)	Force All (kN)	Depth (m)	Velocity (m/s)	C_D	Fr
Subcritical	1	0.315	0.589	0.378	1.01	1.08	0.53
	2	0.251	0.461	0.468	0.82	0.98	0.38
	3	0.490	0.927	0.630	0.90	1.14	0.36
	4	0.437	0.781	0.711	0.80	1.06	

Similarly for th e Nissan Patrol 4WD,

7.3 Testing uncertainties

The following uncertainties in the model testing are noted:

- Measurement uncertainty at both prototype and model scale. This is a minor and quantifiable uncertainty, but nevertheless present.
- Scaling effects. While the scale adopted for the modelling (1:18) was suitable for the major forces of gravity and inertia, minor forces acting on the vehicle may not be well represented at this scale;
    - The impact of very turbulent, pulsating or varying flows has not been considered but is important in initially destabilising a vehicle;
    -

requires the adoption of values for the coefficient of drag (C_D) for the partially submerged vehicle and the coefficient of friction (μ) for the vehicles tyres.

A conservative effective coefficient of friction of 0.3 was adopted on the basis of the discussion in Section 4.2.1 and the findings of Bonham and Hattersly (1967) who considered a braking force coefficient for a wet surface road and a dry surface road with adjustments made for a reduced sideways force compared with breaking force (10%), the reduced slipping force compared with peak breaking force (20%), and a further reduction due to debris that may become caught under the wheels (20%). This results in an adopted coefficient of friction of 0.3 .

An adopted coefficient of drag of 2.0 provides a conservative value based on the range of measured values provided in Section 6 as summarised in Table 6-1. Uplift is assumed to be zero , but can be consideredcobe consi1 0 7vc3try

hazard threshold for a small passenger vehicle from ARR p10 is v.D = 0.3 whereas the data from the testing of the Toyota Yaris results in a v.D threshold of approximately 0.5.

Similarly, the test results presented in Figure 7-4 indicate that the Nissan Patrol 4WD is significantly more stable than the interim Y X O Q H U D E L O L W \ W K U H V K R O G I R U D µ O D U J H ARR P10 of 0.5 . The hazard threshold estimated from the test results for the Nissan Patrol has a factor of safety of more than two (2) times the ARR P10 interim hazard guidelines.

Figure 7-4: Stability Curve for a Nissan Patrol based on full scale traction tests, upper limits for the Coefficient of Drag C_D = 2.0 based on scale testing, and

D BC(c)62 1 0s1(on560 0444lTJ ET BT 0 1 348>0057>-5<0l(s)-ood c)ase tact2.0

3.

9. Acknowledgements

The authors of this report acknowledge the contribution of the NSW State Emergency Service and NSW Office of Environment and Heritage for their substantial funding of this investigation.

10. References

AEMI. (2014) Australian Emergency Management Handbook: Managing the floodplain: best practice in flood risk management in Australia, (AEM I Handbook 7, 2014)

Bird, G. and Scott W.J.O. (1936) Studies in Road Friction, I. Road Surface Resistance to Skidding D.S.I.R., Road Research Tech. Pap. No.1 H.M.S.O., 1936

Bird, G. and Scott W.J.O. (1936)

Kramer M., Terheiden K., and Wieprecht S. (2016) Safety criteria for the trafficability of inundated roads in urban floodings . In: International Journal of Disaster Risk Reduction , 17 pp. 77 ±84 http://dx.doi.org/10.1016/j.ijdrr.2016.04.003

Keller, R .J., and Mitsch, B . F., (1992) Stability of Cars and Children in Flooded Streets In: International Symposium on Urban Stormwater Management (1992 : Sydney, N.S.W.). International Symposium on Urban Stormwater Management: Preprints of Papers. Barton, ACT: Institution of Engineers, Australia, 1992: 264 -268. National conference publication (Institution of Engineers, Austr alia) ; no. 92/1. ISB N: 0858255472

Martínez -Gomariz, E., Gómez, M., Russ R % D Q G ' M R U G M H Y L 6tabi6ty criteria for flooded vehicles: a state -of-the-art review. J Flood Risk Management . doi :10.1111/jfr3.12262
Munson, B. R., Okiishi, T. H., Huebsch W. W. and Rothmayer A. P. (2013) Fundamentals of Fluid Mechanics . 7th edition

NSW SES (2016) Flood safety warning following 300 flood rescues . Web article: http://www.ses.nsw.gov.au/news/76365/77179 accessed 27 September 2016

Oshikawa H., Oshima T. and Komatsu T. 3Study on the Risk for Vehicular Traffic in a Flood Situation ´ (in Japanese). Adv River Eng 2011, 17, 461 ±466

Roads and Maritime Services (2012) Vehicle Standards Information No. 5 Rev6 VSI No.5

Shand, T.D., Cox, R.J., Blacka, M.J. and Smith, G.P. (2011) Australian Rainfall and Runoff Revision Project 10: Appropriate Safety Criteria for Vehicle s - Literature Review . Australian Rainfall and Runoff Revision Project 10. Stage 2 Report. Prepared by the Water Research Labora tory. P10/S2/020. February 2011

Smith, G.P., Davey, E.K., and Cox, R. J. (2014) Flood Hazard . UNSW Australia Water Research Labo ratory Technical Report 2014/07

Shu, C., Xia, J., Falconer, R. A. and Lin, B. (2011) "Incipient Velocity for Partially Submerged Vehicles in Floodwaters". Journal of Hydraulic Research, 49 (6), pp.709 -717

Taborek, J.J. (1957) "Mechanics of Vehicles," Mach ine Design, May 30 -Dec. 26

Toda K., Ishigaki T. and Ozaki T. (2012) 3Experiment study on floating car in flooding. ´ International Conference on Flood Resilience: Experiences in Asia and Europe, Exeter, UK, 2013, 6.

Xia, J., Teo, F.Y., Lin, B. and Falcone r, R.A. (2011) "Formula of Incipient Velocity for Flooded Vehicles". Natural Hazards, 58 (1), pp.1 -14

Xia J., Falconer R.A., Wang Y. and Xiao X. 3New criterion for the stability of a human body in floodwaters. ´ J Hydraul Res 2014, 52, 93 ±104. do i: 10.1080/00221686.2013.875073

Xia J., Falconer R.A., Xiao X. and Wang Y. (2013) 3Criterion of vehicle stability in floodwaters based on theoretical and experimental studies. ´ Nat Hazards 2013, 70, 1619 ±1630. doi: 10.1007/ s11069 -013 -0889 -2.

Wong J.Y, (199 3) Theory of ground vehicles , 2nd ed.